


Thermal Mobile Printer

MOB-59

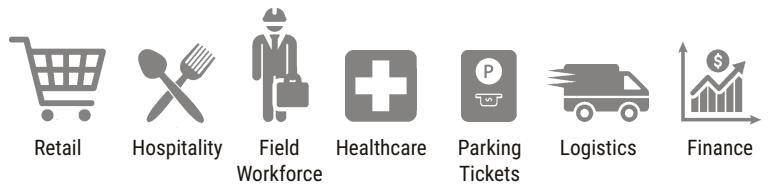

MOB 59 is a thermal mobile printer. It is a versatile printer that is used in various industries for various applications, e.g. retail, hospitality, field workforce, healthcare, parking, logistics, finance, etc. the list is endless. This compact and portable thermal mobile printer is easy to connect with Windows and Linux based devices – the most preferred operating systems in India. What's more, it can be further easily connected remotely through bluetooth instead of being connected physically. Being a thermal printer it eliminates the need for ribbons or cartridges, hence reducing the recurring cost on them and also making it a no-mess printer. It is a direct printer so the print is sharp and easy to read even at smaller point sizes. It is an apt printer for bar codes that can easily be read by a large spectrum of scanners. When it comes to convenience, the paper loading is very easy. No waste of time between changing rolls, even in front of the customer. It also gives you the option to cut the printed output sheet, manually. It does all its work with absolutely low noise – a silent performer.

Thermal Mobile Printer MOB-59



Supercharges your busy staff with industry leading battery life of up to 10 hours.



Weighs just 200 gm and fits perfectly in your palm.



Easy paper loading ensures easy paper changes, even on the go.



Fast and smooth data printing boosts your productivity tenfold.



Printing method	Direct thermal
Printing speed	70 mm/sec
Paper width	58 mm
Diameter of paper roll	<30 mm
Paper thickness	0.06-0.08 mm
Resolution	8 dots (203 dpi)
Character size	ANK, Font A : 12 x 24 dots Font B : 9 x 17 dots Simplified/traditional Chinese : 24 x 24 dots
Column capacity	384 mm dots/line (58mm)
Interface	Bluetooth+USB+Serial
Barcode	UPC-A / UPC-E / JAN13(EAQN13) / JAN8(EAN8) / CODABAR / ITF / CODE39 / CODE93 / CODE128 QR CODE
Code page	PC347 (Standard Europe), Katakana, PC850 (Multilingual), PC860 (Portuguese), PC863 (Canadian-French), PC865 (Nordic), West Europe, Greek, Hebrew, East Europe, Iran (WPC1252), PC866 (Cyrillic#2), PC852 (Latin2), PC858 (Iran, Latvian, Arabic), PT151(1251)
NV flash	64 KBytes
Input buffer	32 KBytes
Power supply	Input : AC 110V/240, 50-60Hz Output : AC 9.5V 1A
Battery	2000 mAh
Reliability	Printing head life 50km
Working environment	Temperature : 0 ~ 45°C Humidity : 10%-80%
Storage environment	Temperature: -10 ~ 60°C Humidity: 10%-90%
Drivers	Win 9X / Win 2000 / Win 2003 / Win XP / Win 7 / Win 8 / Win 8.1 / Linux
Command	Compatible with ESC/POS
Gross Weight	0.19 kg (excluding paper roll)
Dimension	92.5 x 75.5 x 37 mm